


# 3000 NET

## SUNSHADOW SOLAR SCREEN

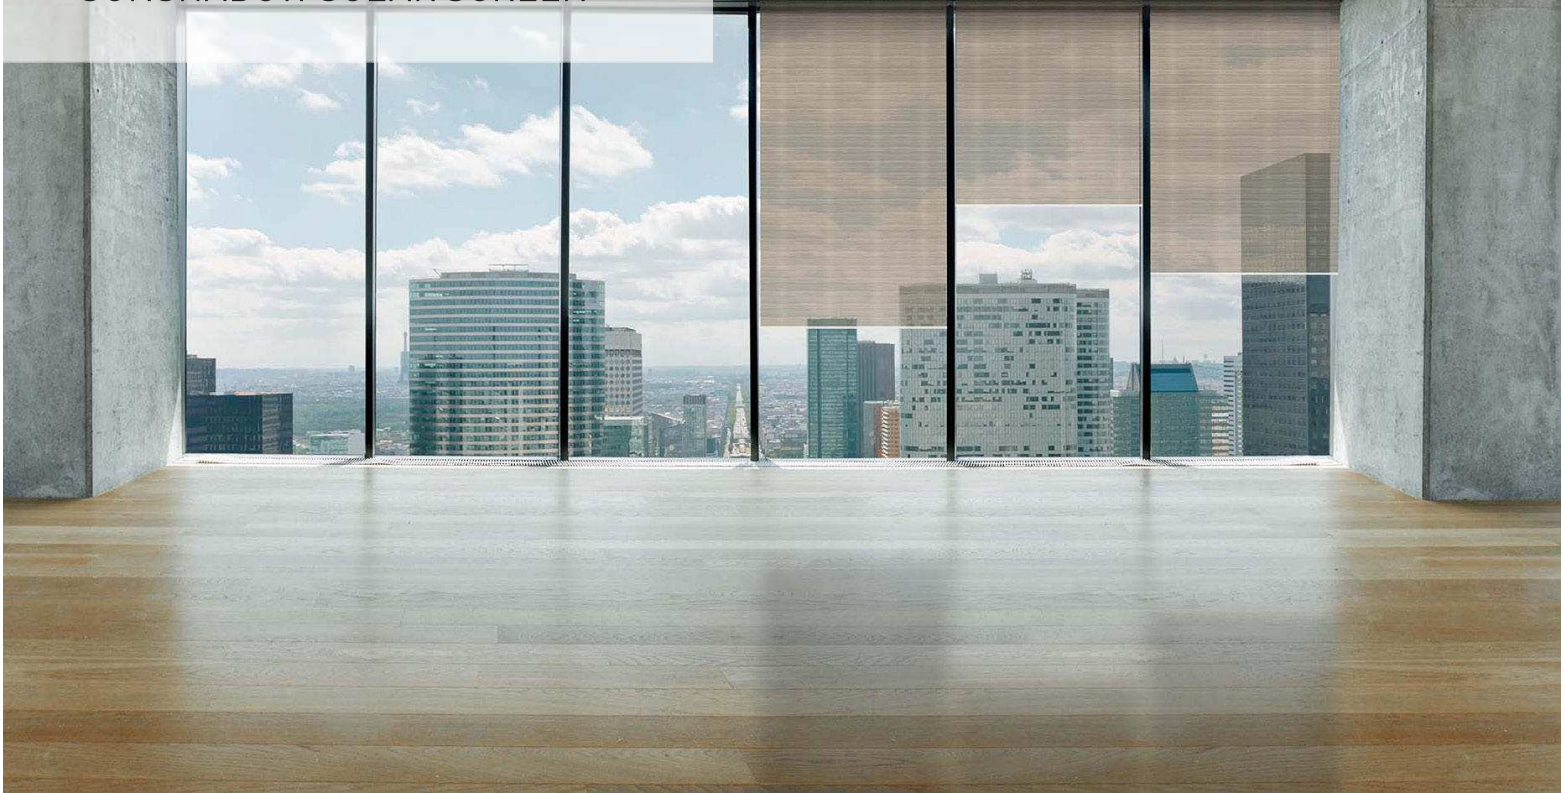

### 3000 NET by Alkenz

Alkenz SunShadow® Solar Screen fabrics offer a stylish and modern aesthetic for window treatments that minimize the negative effects of the sun, while preserving outward visibility.

3000 NET is the most widely used screen due to its 2x2 lightweight basket weave which offers ease of fabrication and versatility.

### FEATURES

- A unique manufacturing process delivers technically superior fabrics that are backed by a limited lifetime warranty.
- Environmentally friendly and safe
- Flame Retardant
- Available in four openness factors - 1%, 3%, 5%, 10%
- Available in 13 colors
- Versatile – can be used in roller shades and panel track applications

ralph  
**friedland** & bros.,  
inc.

Cliffwood Beach, NJ  
P: 800-631-2162  
E: Sales@Rfbcorp.com  
www.friedlandshades.com

The most widely used screen comes in 4 openness factors to suit any room.


## Colors



WHITE/WHITE 1%, 3%, 5%, 10%



WHITE/BEIGE 1%, 3%, 5%, 10%



WHITE/GRAY 1%, 3%, 5%, 10%




BEIGE/BEIGE 1%, 3%, 5%



BEIGE/GRAY 1%, 3%, 5%, 10%




GRAY/GRAY 1%, 3%, 5%



GRAY/DARK GRAY 5%




GRAY/BLUE GRAY



GRAY/BLUE 5%



CHARCOAL/GRAY 1%, 3%, 5%



BRONZE/BRONZE 5%



CHARCOAL/BRONZE 1%, 3%, 5%, 10%



CHARCOAL/CHARCOAL 1%, 3%, 5%, 10%

| SPECIFICATIONS          | 3000 NET 1%  | 3000 NET 3%  | 3000 NET 5%  | 3000 NET 10%   |
|-------------------------|--|--|--|--|
| Composition             | 25% Polyester, 75% PVC                                 | 25% Polyester, 75% PVC                                 | 25% Polyester, 75% PVC                                 | 25% Polyester, 75% PVC                                 |
| Weight                  | 15.28 oz/yd <sup>2</sup> (518 g/m <sup>2</sup> )       | 13.12 oz/yd <sup>2</sup> (445 g/m <sup>2</sup> )       | 12.39 oz/yd <sup>2</sup> (420 g/m <sup>2</sup> )       | 11.36 oz/yd <sup>2</sup> (385 g/m <sup>2</sup> )       |
| Thickness               | 0.026 in (.66mm)                                       | 0.022 in (.55mm)                                       | 0.022 in (.55mm)                                       | 0.020 in (.50mm)                                       |
| Width                   | 78.7" (2m), 98.4" (2.5m), 118" (3m)                    | 78.7" (2m), 98.4" (2.5m), 118" (3m)                    | 78.7" (2m), 98.4" (2.5m), 118" (3m)                    | 78.7" (2m), 98.4" (2.5m), 118" (3m)                    |
| Average roll length     | 33 yd (30m)  | 33 yd (30m)  | 33 yd (30m)  | 33 yd (30m)  |
| Fire Classification     | NFPA 701, M1, B2, B1                                   | NFPA 701, M1, B2, B1                                   | NFPA 701, M1, B2, B1                                   | NFPA 701, M1, B2, B1                                   |
| Environmental standards | Oeko-Tex Standard 100, ISO 14001, ISO 9001, Greenguard | Oeko-Tex Standard 100, ISO 14001, ISO 9001, Greenguard | Oeko-Tex Standard 100, ISO 14001, ISO 9001, Greenguard | Oeko-Tex Standard 100, ISO 14001, ISO 9001, Greenguard |

\*For complete technical information, current test results, performance specifications, and samples, please contact our marketing department.



ralph  
**friedland** & bros.,  
inc.

Cliffwood Beach, NJ  
P: 800-631-2162  
E: Sales@Rfbcorp.com  
www.friedlandshades.com